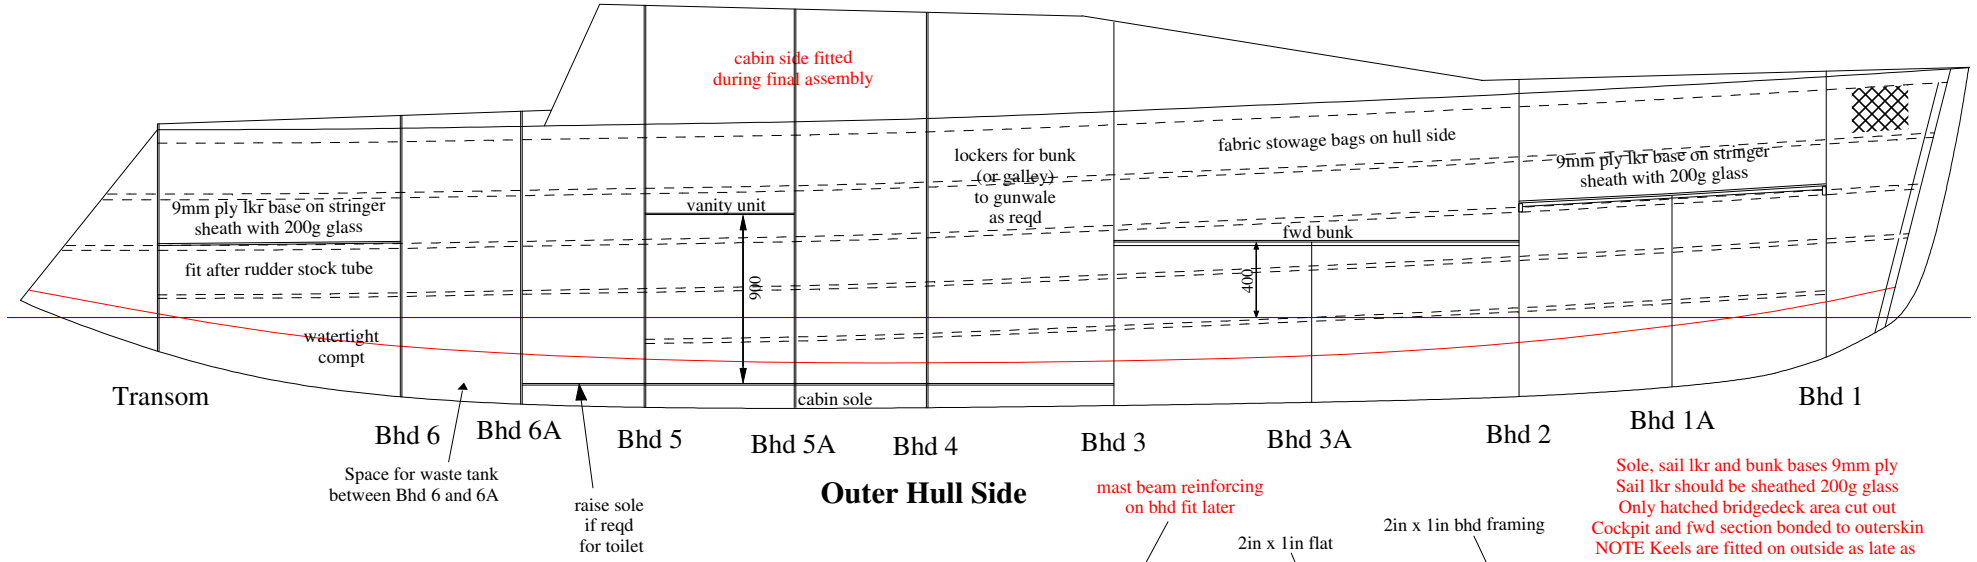


## Outer Hull Side

Sole, sail lkr and bunk bases 9mm ply
Sail lkr should be sheathed 200g glass
Only hatched bridgedeck area cut out
Cockpit and fwd section bonded to outerskin
NOTE Keels are fitted on outside as late as
possible to simplify building

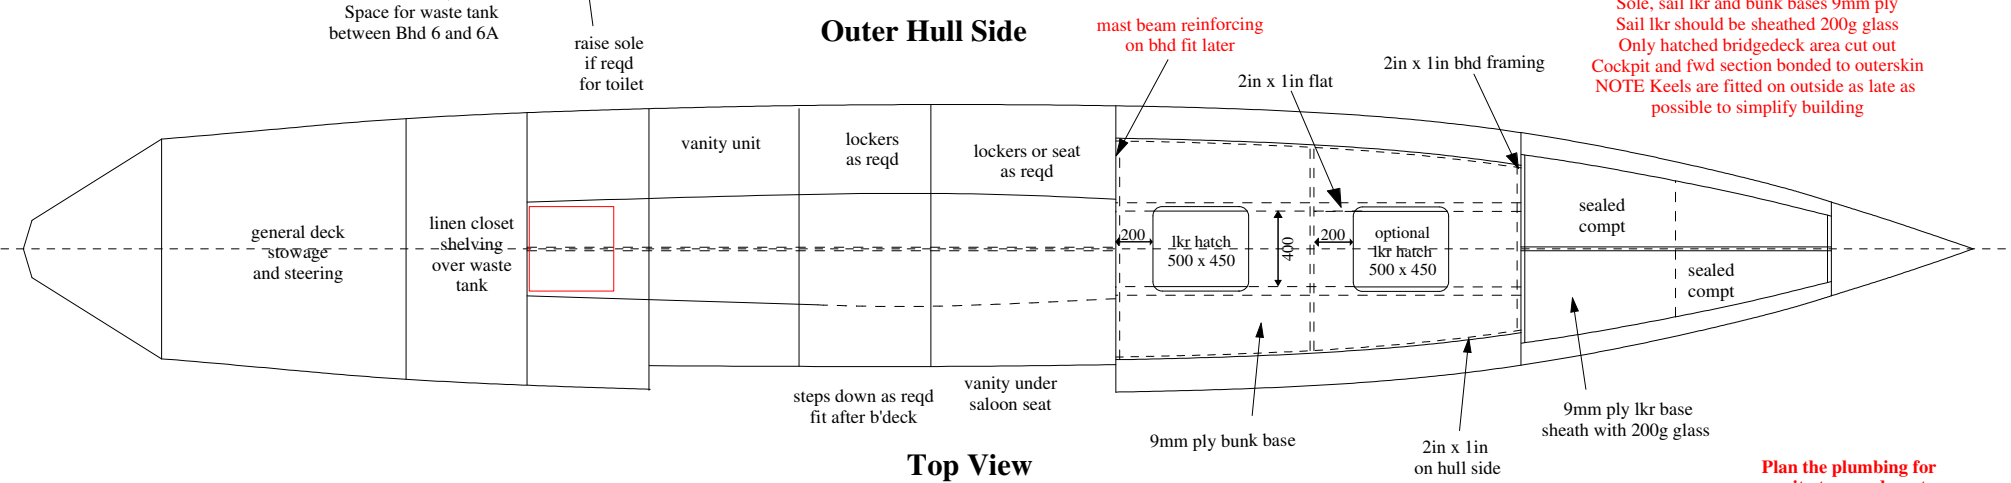


## Top View

**Plan the plumbing for**
**vanity taps and waste**
**Shower head and sump**
**Toilet in and out**
**Black water tank out**
**before fitting soles!**

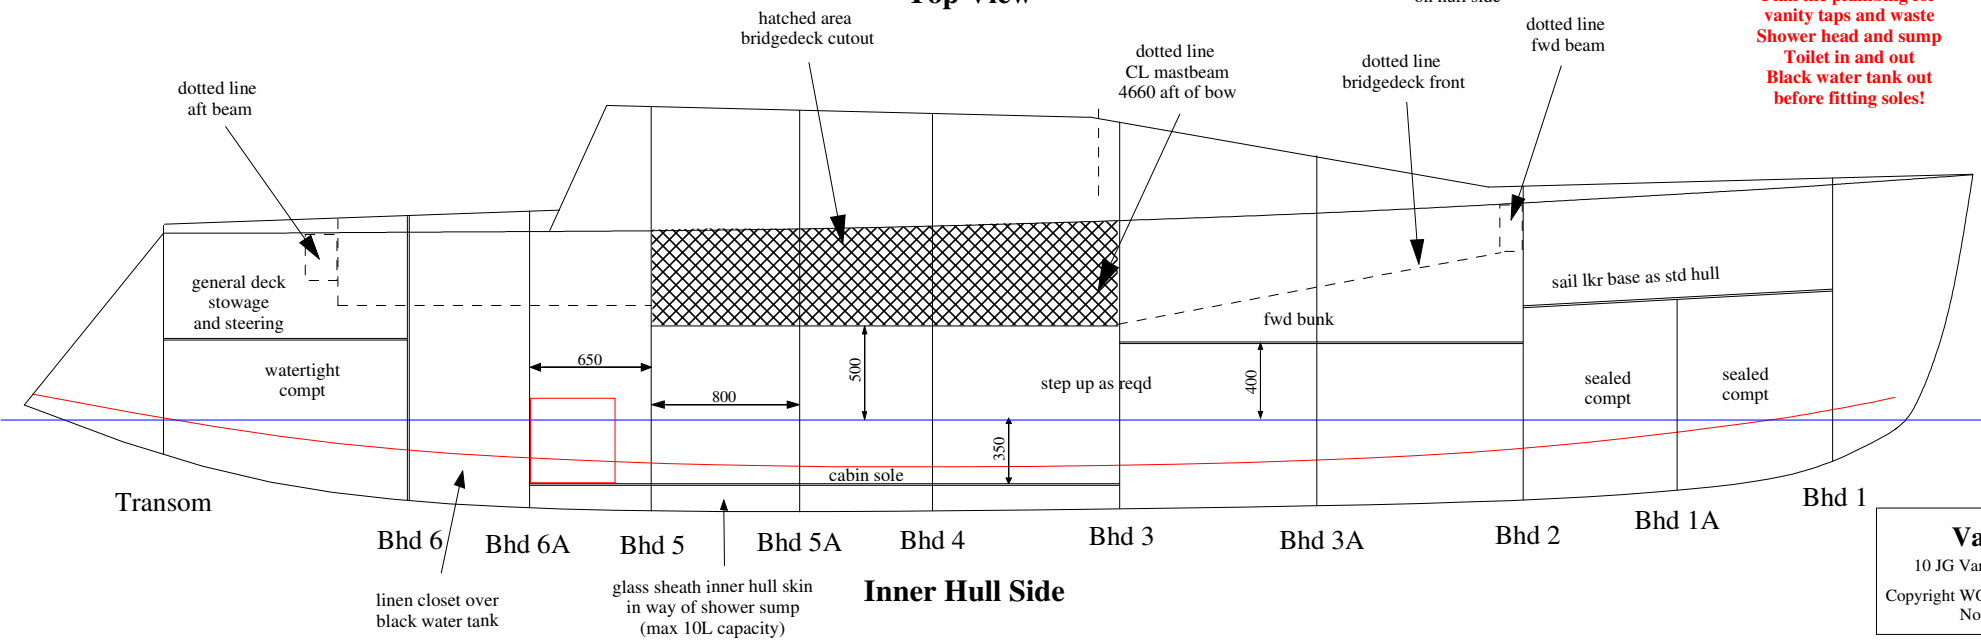


## Inner Hull Side

**Vardo**
10 JG Vardo Port Hull

Copyright WOODS DESIGNS
Nov 2011