


NOTE: Aft beam position is fixed fwd of BHD5 but fwd beam position depends on your own outriggers Position shown here is for Quattro 16 which has CL spacing of beams of 1810

If your beach cat has different spacing then the fwd beam and kingpost needs moving forward or aft to match The windscreen roof may also need adjusting to suit but can be left overhanging the aft edge of the kingpost


Beam pivots up box shown for a 100mm dia (4in) tube adjust width to suit own beam but make at least 6mm over width

side view through beam boxes

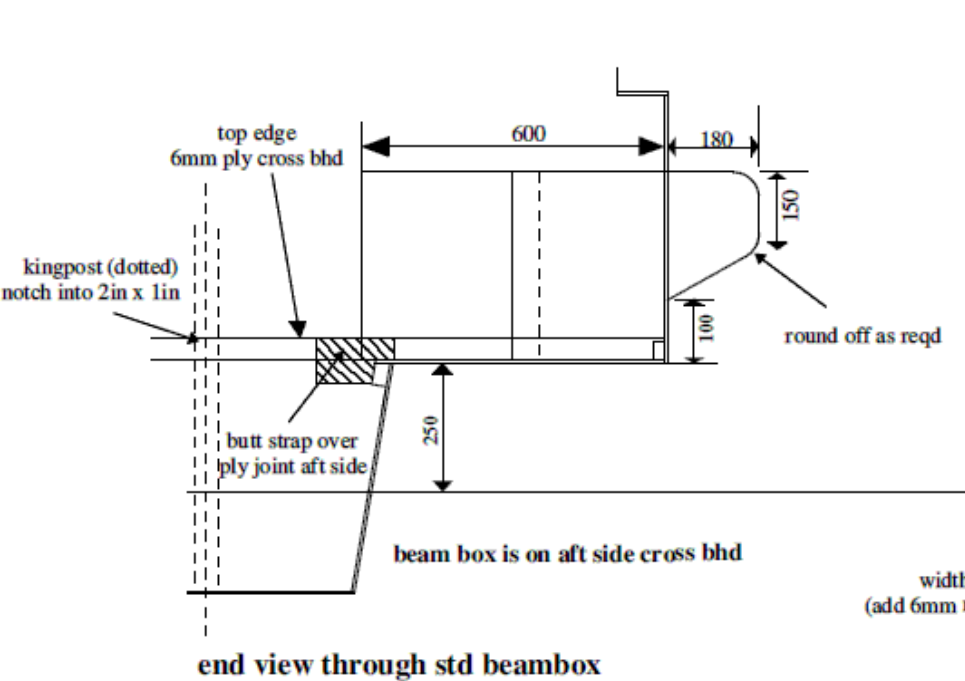

width to suit own crossbeam width (add 6mm min to allow for building tolerances)

end view through std beambox

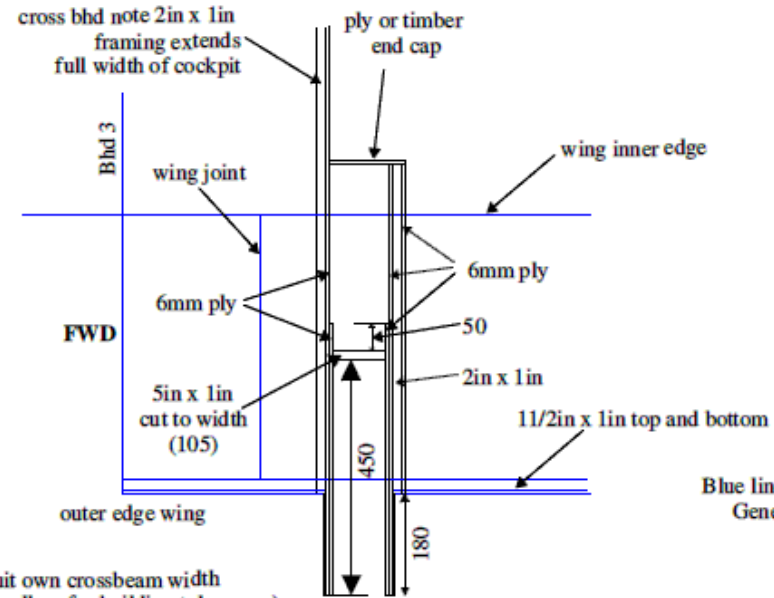

Blue lines indicate parts already made General box details as aft beam

Strike 18
18 fwd beambox
Copyright WOODS DESIGNS
Jan 2008

top view port box at pivot bolt